

ORDINANCE NO. 409

An Ordinance entitled an Ordinance to regulate all plumbing in Tillamook City...

Section One: The Mayor with the approval of the Common Council shall appoint a plumbing inspector...

Section two: It shall be unlawful for any person or persons to make any connections with, or in any manner obstruct or interfere with any public sewer or drainage...

Section three: Every dwelling house, lot, apartment or tenement house, factory, store or other building in which plumbing arrangements have been or are placed...

Section four: It shall be unlawful for any person or persons to make any connection with, or in any manner obstruct or interfere with any public sewer in the City of Tillamook...

Section five: The material used in the construction of such private sewer or drain pipes shall be substantially like that used in the public sewer with which connection is made...

Section six: No person or persons shall connect any open gutter, cess pool, or privy vault or cistern with any public sewer...

Section seven: It shall be unlawful to construct or extend any drain for the reception of sewerage or waste water under, or into any hotel, tenement house, dwelling or any building...

The arrangements of soil and waste pipes must be as direct as possible and have a fall of not less than one-eighth of one inch per foot towards the sewer or cess pool or septic tank...

The soil pipe within the house shall be continued above the roof and left above so that the whole drain may be thoroughly and constantly ventilated...

Section eight: All sewers, soil or waste pipes within the building shall be of cast iron supported by substantial piers or properly secured to the walls...

Section nine: There shall be a clean-out in every "Y" in the soil pipe at the foot of each vertical line of said pipe...

Section ten: Rain water leaders shall never be used as soil, waste or vent pipes...

Section eleven: All cast iron pipe shall be found free from defects, thoroughly coated inside and out with coal asphaltum or pitch...

but the first 36 feet, measuring from the top fixture down.

Section eleven A: The waste pipe for each and every sink, basin, toilet, water-closet, urinal, and each of the trays or other fixtures shall be separately and effectually trapped.

All bath tubs shall be trapped with a drum trap or P trap, at the discretion of owner, of lead or brass, without clean-out at base of trap if P trap is used.

Section twelve: No more than two basins, or two pantry sinks, two cuspidors, or two drinking fountains shall be connected on one, one and one-half inch waste line.

Section thirteen: Joints in cast iron pipe shall be made with an oakum gasket and pure lead well caulked, and neither paint, varnish, nor putty will be allowed until the joint has been tested.

Section fourteen: Each and every trap shall be ventilated with a vent pipe in cases where the size of the trap is two inches or less, the vent pipe may start not more than four inches away from the water line of the trap...

Section fifteen: Each trap must be ventilated by an air pipe not less than the size of the trap used, except traps larger than one and one-half inches...

Section sixteen: A battery of less than four wash trays may be served through one trap. Where less than four wash basins in barber shops or office buildings...

Section seventeen: The discharge from any fixture shall pass through no more than one trap before reaching the main drain soil or waste pipe.

Section eighteen: Basins in barber shops shall be trapped in a similar manner, unless an approved type of brass non-siphoning trap be used upon the house drain or house sewer.

Section nineteen: The following table shall be used to determine the size of traps and soil and waste pipes: Number of closets allowed; where soil or branch is 4 inches in diameter, 12 closets allowed...

house drain or house sewer.

Section twenty: All sewers, soil or waste pipes shall be as direct as possible. Changes in direction of horizontal pipes shall be made with "Y" branch, or one eighth bends.

Section twenty-one: All excavations made in any street or alley shall be protected and guarded by the contractor both by day and by night...

Section twenty-two: Where safes are placed under fixtures, the safe wastes, if any, shall run to some place in open sight inside of building and shall not be less than one inch in diameter.

Section twenty-three: Every water closet within the building shall be supplied with water from a separate tank or cistern which shall be so arranged as to deliver at least four gallons at each flushing...

Section twenty-four: Enclosing of water closets with wood casings shall not be permitted.

Section twenty-five: Water closets, unless they be properly ventilated shall never be placed in an unventilated room or compartment...

Section twenty-six: Waste water from fixtures in houses when public sewer is not available may be conveyed to cess pool and septic tank...

Section twenty-seven: No steam exhaust blow-off or drip pipe shall connect directly with the sewer house drain, soil, waste, or vent pipe...

Section twenty-eight: Where special fixtures are required for which there are no provisions in these rules and regulations...

Section twenty-nine: In all cases where a building is used as a hotel, butcher shop, creamery, laundry or restaurant...

Section thirty: All master plumbers before doing any plumbing whatever in Tillamook City shall secure from the City Recorder upon proper showing...

Section thirty-one: All excavations made in any street or alley shall be protected and guarded by the contractor both by day and by night...

Section thirty-two: The Plumbing Inspector shall be promptly notified when any work is ready for inspection, and he shall inspect such work forthwith.

Section thirty-three: Plumbing work shall be tested by water. If by air test it shall be by five pounds pressure, and it shall be discretionary with the inspector as to which test shall be applied.

Section thirty-four: All water pipes used to supply hot or cold water to fixtures must be so placed that they will have a fall of at least one eighth of an inch to the foot...

Section thirty-five: All stables and garages having wash racks for washing vehicles and having said racks connected with city sewers shall have catch basins to prevent sand or heavy matter from entering the sewer.

Section thirty-six: That Plumber Inspector shall inspect all plumbing reported by any plumber to the City Health Officer...

Section thirty-seven: The arrangements of soil and waste pipes must be as direct as possible and have a fall of not less than one-eighth of one inch per foot towards the sewer or cess pool or septic tank...

Section thirty-eight: The soil pipe within the house shall be continued above the roof and left above so that the whole drain may be thoroughly and constantly ventilated...

Section thirty-nine: All sewers, soil or waste pipes within the building shall be of cast iron supported by substantial piers or properly secured to the walls...

Section forty: There shall be a clean-out in every "Y" in the soil pipe at the foot of each vertical line of said pipe...

Section forty-one: Rain water leaders shall never be used as soil, waste or vent pipes...

Section forty-two: All cast iron pipe shall be found free from defects, thoroughly coated inside and out with coal asphaltum or pitch...

Section forty-three: Basins in barber shops shall be trapped in a similar manner, unless an approved type of brass non-siphoning trap be used upon the house drain or house sewer.

Section forty-four: The following table shall be used to determine the size of traps and soil and waste pipes...

Section forty-five: All excavations made in any street or alley shall be protected and guarded by the contractor both by day and by night...

Section forty-six: That Plumber Inspector shall inspect all plumbing reported by any plumber to the City Health Officer...

Section forty-seven: The arrangements of soil and waste pipes must be as direct as possible and have a fall of not less than one-eighth of one inch per foot towards the sewer or cess pool or septic tank...

Section forty-eight: The soil pipe within the house shall be continued above the roof and left above so that the whole drain may be thoroughly and constantly ventilated...

Section forty-nine: All sewers, soil or waste pipes within the building shall be of cast iron supported by substantial piers or properly secured to the walls...

Section fifty: There shall be a clean-out in every "Y" in the soil pipe at the foot of each vertical line of said pipe...

Section fifty-one: Rain water leaders shall never be used as soil, waste or vent pipes...

Section fifty-two: All cast iron pipe shall be found free from defects, thoroughly coated inside and out with coal asphaltum or pitch...

Section fifty-three: Basins in barber shops shall be trapped in a similar manner, unless an approved type of brass non-siphoning trap be used upon the house drain or house sewer.

Section fifty-four: The following table shall be used to determine the size of traps and soil and waste pipes...

Section fifty-five: All excavations made in any street or alley shall be protected and guarded by the contractor both by day and by night...

Section fifty-six: That Plumber Inspector shall inspect all plumbing reported by any plumber to the City Health Officer...


Section fifty-seven: The arrangements of soil and waste pipes must be as direct as possible and have a fall of not less than one-eighth of one inch per foot towards the sewer or cess pool or septic tank...

DEW DROP IN RESTAURANT

NETARTS, ORE. CHICKEN DINNER SUNDAY, JUNE 8th, and every Sunday this season.

Also sea food specialty for dinner parties. PHONE 9 F 12.

Mrs. Ann Bowen.

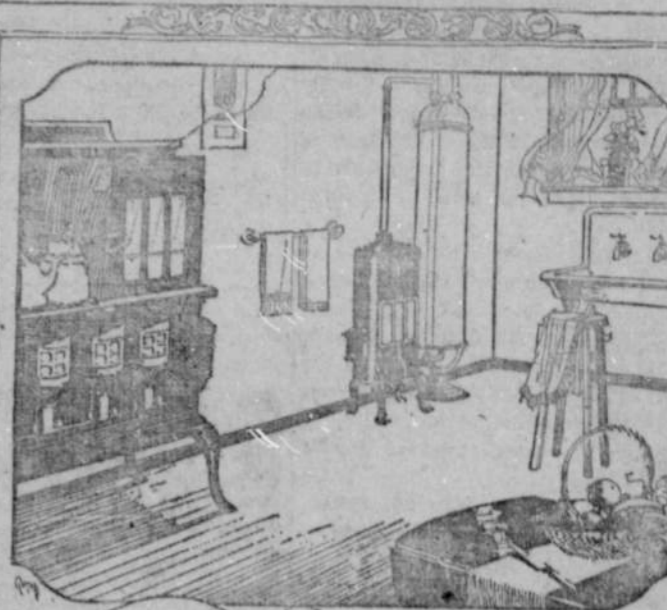

Your Kitchen clean as a new pin



YOU can keep it that way when you use a good oil cookstove. No drudgery—no dirt. Just touch a match to the burner and you have clean intense cooling heat.

PEARL OIL HEAT AND LIGHT

Vacation Trips

Plan now for a visit back east to your old home town. BACK EAST Low round Trip Tickets, THROUGH California Sale at Reduced Rate.

Week End Special Train

Is now operating between Portland and Tillamook. Leaves Portland Saturday 12:45 p. m. Arrives Tillamook 8:10 p. m.

SOUTHERN PACIFIC LINES.

JOHN M. SCOTT, General Passenger Agent